

Johnny 80 (3.2") 2L Square Ceiling Semi-Recessed Spot

Description

LED luminaire for recessed mounting into plasterboard ceilings. Illumination system consisting of one or two adjustable lights in a recessed version (trim or trimless) or in a semi recessed version. Available in two sizes: 80 mm (3.2") and 120 mm (4.7") in round and square versions. The Johnny 120 is supplied with two frame rings (black and white), which should be fitted to the product if a trimmed version is required, or without, if a Trimless version is required. An exclusive, easy and adjustable system that enables an accurate adjustment of the light beam. The Trimless Ø80 mm (3.2") version has an exclusive Fast&Perfect installation tool.



Lamps

POWER LED : CREE
 12.4W, 2 x 600lm, 3000K, CRI90
 12.4W, 2 x 560lm, 2700K, CRI90
 Delivered lumen from 568 lm up to 756 lm

Construction

Luminaire body made of die cast aluminum
 Should ready Honeycomb louver and cross baffle.
 Factory suggest 5" minimum plenum height.

Electrical

Fixture is constant current, low voltage LED with integral power supply.
 Fixture is 12.4 watts (6.2W per head).

Finish



Notes

Semi-Recessed luminaire for LED light source.
 Beam spreads available in 14°, 23° and 33°.
 The Johnny 80 (3.2") version has an orientation system integrated into the telescopic body.






Maximum rotation 360°
 Maximum tilt angle 40°
 Listings: UL listed, IP20

Warranty

2 years from date of sale.

Photometrics

For current IES files please visit architectural.flosusa.com

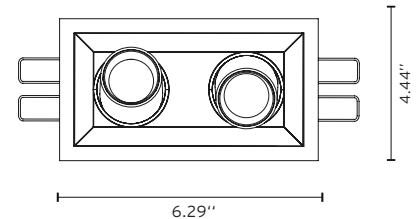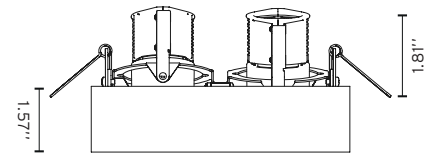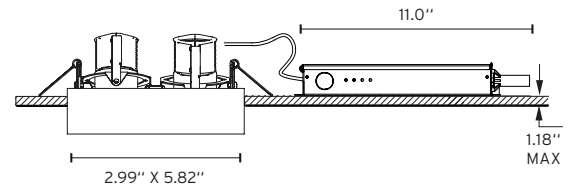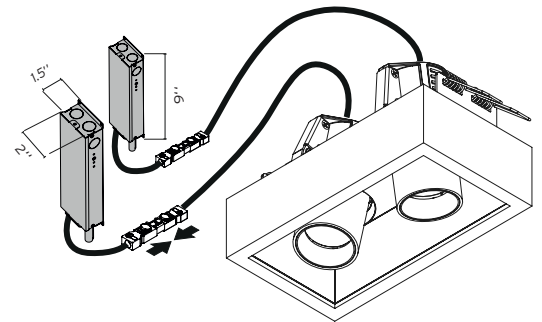

Johnny 80 (3.2") 2L Square Ceiling Semi-Recessed Spot

How to Specify ex. **03.0731.CE.UL**

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	03.0731	14°	Johnny 80 Semi-Recessed 2L, 12.4W, 2x 560lm, 2700K, CRI90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0730	14°	Johnny 80 Semi-Recessed 2L, 12.4W, 2x 600lm, 3000K, CRI90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0733	23°	Johnny 80 Semi-Recessed 2L, 12.4W, 2x 560lm, 2700K, CRI90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0732	23°	Johnny 80 Semi-Recessed 2L, 12.4W, 2x 600lm, 3000K, CRI90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0735	33°	Johnny 80 Semi-Recessed 2L, 12.4W, 2x 560lm, 2700K, CRI90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
	03.0734	33°	Johnny 80 Semi-Recessed 2L, 12.4W, 2x 600lm, 3000K, CRI90	<input type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White <input type="checkbox"/> CE = Concrete <input type="checkbox"/> TK = Teak	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V

Johnny 80 (3.2") 2L Square
Ceiling Semi-Recessed Spot

Optional Accesories

Image	QTY	Item Number	Description
		TRAY-0028	Registration Tray -non electrical, place holder for non IC new construction, 2.99 x 5.82"