

Light Supply Fixed, Trimmed

Ceiling Recessed Fixed Downlight

Description

A range of compact LED downlights capable of up to 3000 lm output, specially designed for public spaces and retail installations. Offering a wide range of options, optics and accessories, the Light Supply is available in fixed, wall-washer and adjustable versions, as well as trimmed and trimless, making a complete family that can be used throughout a project for many different lighting needs.

Lamps

LED: Xicato
 26W, 2280lm, 3000K, CRI 98, 50°
 28W, 3000lm, 3000K, CRI 80, 50°
 28W, 3000lm, 4000K, CRI 80, 50°

Delivered lumen from 1158 lm up to 2270 lm

Construction

The Fixed Trim version is available with external black or white ring combined with internal white or chrome reflector.

Injection molded specular reflector with a matte finish.


Die cast aluminum lamp body.

Accessories include: pre-installation frame or Soft Architecture installation plate. Available finishes: white (40) and black (14)

Photometrics

For current IES files please visit architectural.flosusa.com

Finish



Electrical

Fixture is constant current, low voltage 26W or 28W LED (integral)

Available with splice box, containing 0-10V or ELV dimmable constant current driver.

Notes

Fixture comes with separate trimless installation frame which allows for installation in sheet rock and special construction ceilings up to 1/2" thick

Trimless versions must be mounted in a standard pre-installation metal frame (shipped separately with product) or in a Soft Architecture technology installation

Spot, medium and flood reflectors are available as accessories to change the light beam angle




10.9" (277mm) minimum plenum height

Housing details available upon request

Listings: UL Listed, IP44 damp location

Warranty

2 years from date of sale.

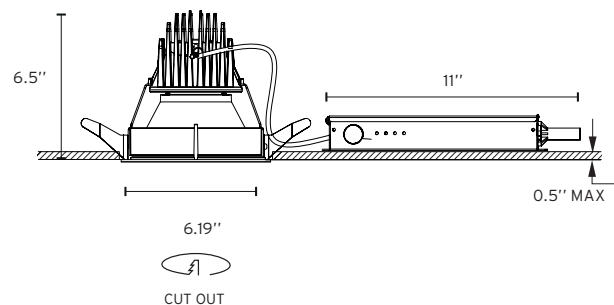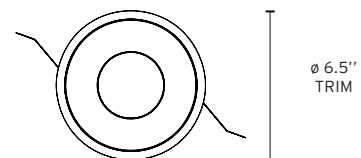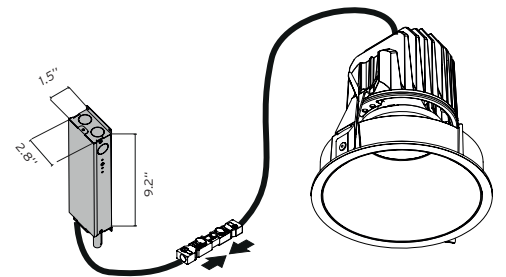

Light Supply Fixed, Trimmed

Ceiling Recessed Trimmed Fixed Downlight

How to Specify ex. 03.6611.3C.UL

Item Number	Description	Finish	Power Supply
03.6611	Light Supply Fixed Trimmed, LED, 26W, 2280lm, 3000K, CRI 98	<ul style="list-style-type: none"> <input type="checkbox"/> <input type="checkbox"/> 1B = Black / White <input type="checkbox"/> <input type="checkbox"/> 1C = Black / Aluminium <input type="checkbox"/> <input type="checkbox"/> 3B = White / White <input type="checkbox"/> <input type="checkbox"/> 3C = White / Aluminium 	90 = Housing with LED driver 830mA, ELV, 120V UL = Splice Box, 1% Dim, 0-10V, 120V 7U = Splice Box, 1% Dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V
03.6609	Light Supply Fixed Trimmed, LED, 28W, 3000lm, 3000K, CRI 80	<ul style="list-style-type: none"> <input type="checkbox"/> <input type="checkbox"/> 1B = Black / White <input type="checkbox"/> <input type="checkbox"/> 1C = Black / Aluminium <input type="checkbox"/> <input type="checkbox"/> 3B = White / White <input type="checkbox"/> <input type="checkbox"/> 3C = White / Aluminium 	90 = Housing with LED driver 830mA, ELV, 120V UL = Splice Box, 1% Dim, 0-10V, 120V 7U = Splice Box, 1% Dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V
03.6610	Light Supply Fixed Trimmed, LED, 28W, 3000lm, 4000K, CRI 80	<ul style="list-style-type: none"> <input type="checkbox"/> <input type="checkbox"/> 1B = Black / White <input type="checkbox"/> <input type="checkbox"/> 1C = Black / Aluminium <input type="checkbox"/> <input type="checkbox"/> 3B = White / White <input type="checkbox"/> <input type="checkbox"/> 3C = White / Aluminium 	90 = Housing with LED driver 830mA, ELV, 120V UL = Splice Box, 1% Dim, 0-10V, 120V 7U = Splice Box, 1% Dim, 0-10V, 277V GT = Splice box, 10% dim, ELV, 120V

Optional Accesories

Image	QTY	Item Number	Description
		TRAY-0007	Registration tray -non electrical, place holder for non IC new construction, ø 6.19"