

Light Shooter Adjustable Trimmed

Ceiling Recessed Trimmed Adjustable Downlight

Description

High performance recessed luminaires that combines the latest LED technology and a very efficient conical system. The Light Shooter is designed to give you the highest output with excellent glare protection. Offering a wide range of options, optics and accessories, the Light Supply is available in fixed, wall-washer and adjustable versions, as well as trimmed and trimless, making a complete family that can be used throughout a project for many different lighting needs.



Lamps

LED: Cree
 10W, 910lm, 3000K, CRI 90
 10W, 850lm, 2700K, CRI 90
 Delivered lumen from 420 lm up to 598 lm

Electrical

Constant current, low voltage 11W LED (integral)
 0-10v dimmable constant current driver and ELV.

Construction




The fixed and adjustable LED versions are available with enclosed and open optics (14 degree and 26 degree).
 Die Cast aluminium lamp body.
 Accessories include: elliptical distribution lens and anti-glare grid in aluminium cells with black liquid paint finish

Notes

Factory suggests 10" (254mm) minimum plenum height.
 Listings: UL Listed, IP44 damp location with added lens.

Warranty

2 years from date of sale.

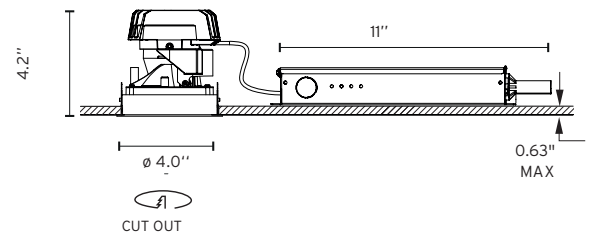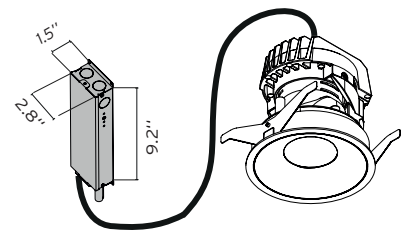

Photometrics

For current IES files please visit architectural.flosusa.com

Finish

40= White 14= Black






How to Specify

ex. 03.6560.40AUL

QTY	Item Number	Beam Angle	Description	Finish	Power Supply
	03.6560	14°	Light Shooter Adjustable Trimmed, LED, 11W, 1060lm, 3000K, CRI 90	<input checked="" type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White	AUL = Splice Box, 1% dim, 0-10V, 120V
	03.6561	26°			A7U = Splice Box, 1% dim, 0-10V, 277V AGT = Splice Box, 10% dim, ELV, 120V
	03.6562	14°	Light Shooter Adjustable Trimmed, LED, 11W, 910lm, 2700K, CRI 90	<input checked="" type="checkbox"/> 14 = Black <input type="checkbox"/> 40 = White	UL = Splice Box, 1% dim, 0-10V, 120V
	03.6563	26°			7U = Splice Box, 1% dim, 0-10V, 277V GT = Splice Box, 10% dim, ELV, 120V

Light Shooter Adjustable Trimmed
Ceiling Recessed Trimmed Adjustable Downlight

Optional Accesories

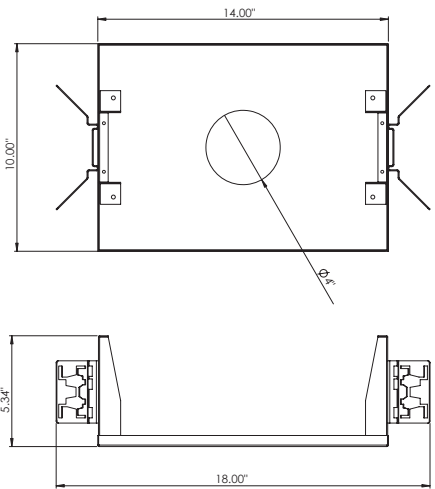Image	QTY	Item Number	Description
		08.8041.68	Elliptical Lens
		08.8412.14	Honeycomb anti-glare louvre
		TRAY-0016	Registration Tray -non electrical, place holder for non IC new construction, Ø 4"