

Light Sniper Adjustable Square LED

Ceiling Recessed Trimmed Adjustable Accent

Description

High performance recessed luminaires available for halogen, metal halide, or integral LED. With a 1.75" aperture and a true 40 degree aiming angle, the Light Sniper offers high comfort due to the back visual position of the light source. Toolless aiming holds its focus indefinitely. Fixed, adjustable and wall washer versions available.

Lamps

LED: Cree
11W, 910lm, 2700K, CRI 90
11W, 1060lm, 3000K, CRI 90

Delivered lumen from 338 lm up to 540 lm

Construction

Fixture made of two die cast aluminum bodies.

Round trim made of steel sheet 1/16" thick with white matte finish.

It incorporates inner trim ring in three different finishes: black, matte gold and chrome.

Inner ring can be removed for easy access to the adjustable components.

Photometrics

For current IES files please visit architectural.flosusa.com

Finish

06 White/Chrome
 14 White/Black
 GL White/Gold



Electrical

Non-IC rated splice box for retrofit or new construction contains 0-10V or ELV constant current dimmable driver.

Notes

Maximum tilt angle 40°

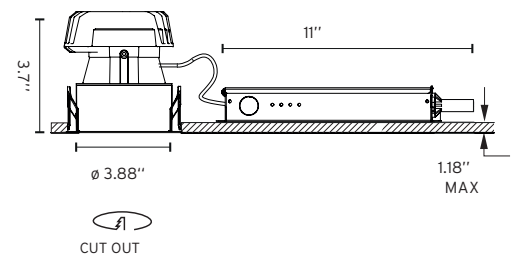
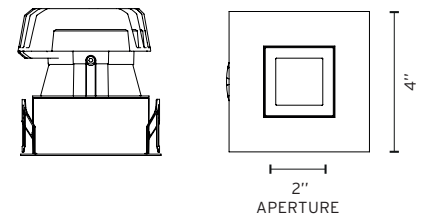
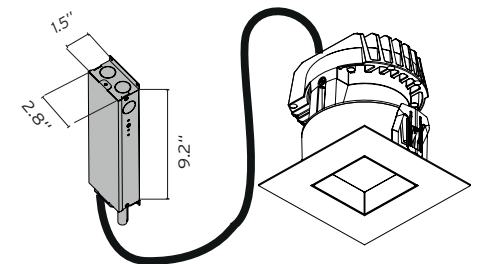
Maximum rotation 360°

Factory suggests 6.1" (155mm) minimum plenum height.

Listings: UL Listed, IP44 damp location with added lens.













Warranty

2 years from date of sale.



Light Sniper Adjustable Square LED
Ceiling Recessed Trimmed Adjustable Accent





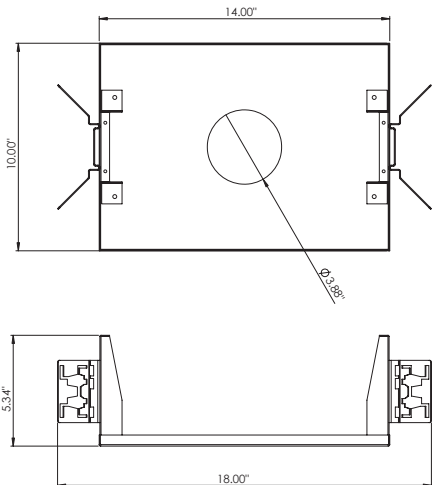
How to Specify ex. 03.4987.06.UL

QTY	Item Number	Beam Angle	Description	Finish	Power Suply
	03.4987	15°	Light Sniper Adjustable Square, LED, 11W, 910lm, 2700K, CRI 90	 06 = White Trim/Chrome Ring  14 = White Trim/Black Ring  GL = White Trim / Gold Ring	UL = Splice Box, 1% dim, 0-10V, 120V 7U = Splice Box, 1% dim, 0-10V, 277V GT = Splice Box, 10% dim, ELV, 120V
	03.4999	26°	Light Sniper Adjustable Square, LED, 11W, 910lm, 2700K, CRI 90	 06 = White Trim/Chrome Ring  14 = White Trim/Black Ring  GL = White Trim / Gold Ring	UL = Splice Box, 1% dim, 0-10V, 120V 7U = Splice Box, 1% dim, 0-10V, 277V GT = Splice Box, 10% dim, ELV, 120V
	03.4986	15°	Light Sniper Adjustable Square, LED, 11W, 1060lm, 3000K, CRI 90	 06 = White Trim/Chrome Ring  14 = White Trim/Black Ring  GL = White Trim / Gold Ring	AUL = Splice Box, 1% dim, 0-10V, 120V A7U = Splice Box, 1% dim, 0-10V, 277V AGT = Splice Box, 10% dim, ELV, 120V
	03.4998	26°	Light Sniper Adjustable Square, LED, 11W, 1060lm, 3000K, CRI 90	 06 = White Trim/Chrome Ring  14 = White Trim/Black Ring  GL = White Trim / Gold Ring	AUL = Splice Box, 1% dim, 0-10V, 120V A7U = Splice Box, 1% dim, 0-10V, 277V AGT = Splice Box, 10% dim, ELV, 120V

Light Sniper Adjustable Square LED

Ceiling Recessed Trimmed Adjustable Accent

Optional Accesories

Image	QTY	Item Number	Description
		08.8041.68	Elliptical Lens
		08.8412.14	Honeycomb anti-glare louvre
		08.8240.00A	Flush ceiling square frame
		08.8243.00	Ceiling protector accessory to be used without housing for trimmed application
		TRAY-0013	Registration Tray -non electrical, place holder for non IC new construction, Ø 3.88"