

Battery 2L Trimless

Ceiling Recessed Downlight

Description

1, 2 or 3 lamp adjustable system, for recessed ceiling thicknesses of up to 30mm (1.2") . Suitable for use with LED lamps capable up to 2290lm output per point of light.. The Battery family is available in trimmed and trimless options.

Lamps

LED : Bridgelux
2x 16.5W, 2x 2159lm, 3000K, CRI80

Notes

The installation frame has to be order separately

Maximum tilt angle 40°

Beam spreads available in 29° and 44°

Optional fill ers to be ordered separately

Listings: UL Listed, IP20

Installation frame ordered separately. When ordering registration tray the installation frame is included

Warranty

2 years from date of sale.

Photometrics

For current IES files please visit architectural.flosusa.com

Finish

■ 14 Black



Construction

Pressed steel and matte black, powder-coated recessed housing

Innovative steel bracket fixing system, painted black, with allen key locking mechanism

Adjustable depth for trimless installations via thumb screws in frame

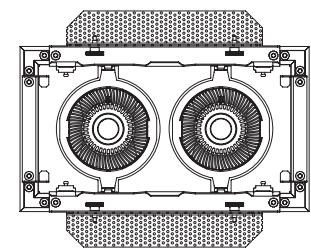
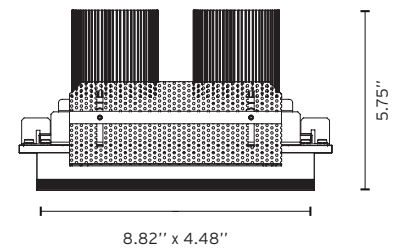
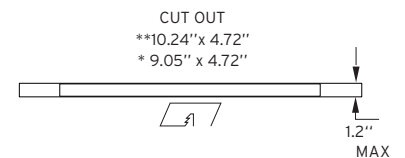
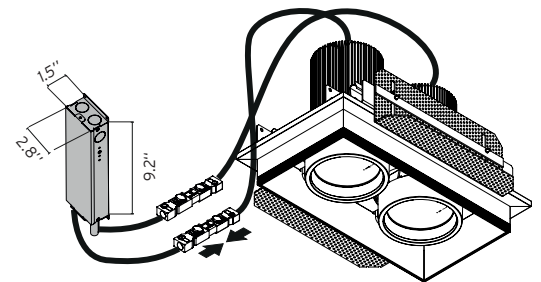
Electrical

Fixture is constant current, low voltage
16.5W per head

LED integral included non replaceable

Ceiling mounted driver/splice box contains dimmable 0-10V driver standard


Consult factory for housing option



**Inaccessible ceiling
* Accessible ceiling: modular/open

Battery 2L Trimless
Ceiling Recessed Downlight

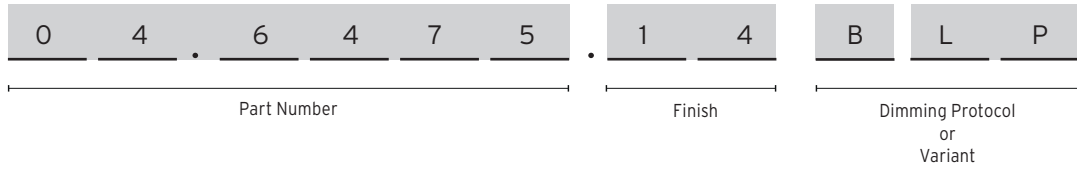How to Specify




How to Specify ex. 04.6475.14BLP + 08.8524.00


QTY	Part Number	Beam Angle	Description	Delivered Lumens	Finish	Dimming Protocol
	04.6475	29°	Battery 2L, Spot, 2 x 16.5W, 2 x 2159lm, CRI80 3000K	2630 lm	■ 14 = Black	BLP = Splice Box, 1% dim, 0-10V, 120V B7X= Splice box, 1% dim,0-10V, 277V
	04.6476	44°	Battery 2L, Flood, 2 x 16.5W, 2 x 2159lm, CRI80 3000K	2444 lm	■ 14 = Black	BLP = Splice Box, 1% dim, 0-10V, 120V B7X= Splice box, 1% dim,0-10V, 277V

Battery 2L Trimless
Ceiling Recessed Downlight

Required Accesories





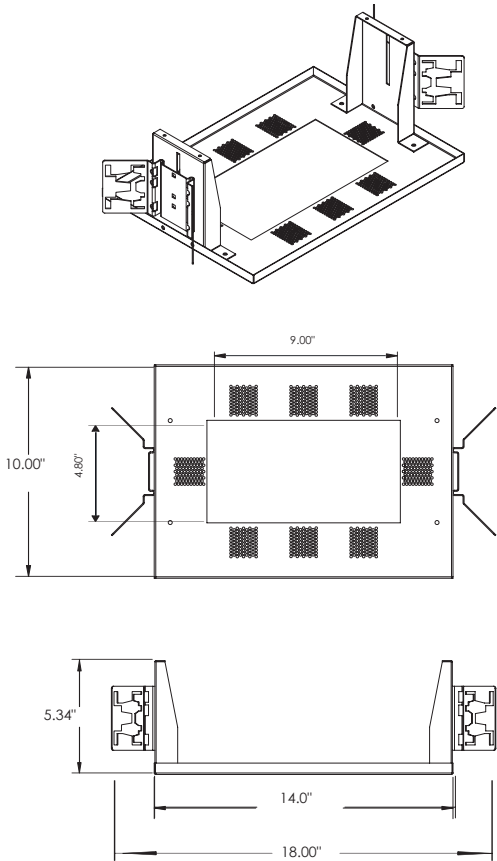




Image	QTY	Item Number	Description
		08.8524.00	Installation frame Battery 2L trimless

Optional Accesories

Image	QTY	Item Number	Description
		TRAY-0024-2	Registration Tray -non electrical, place holder for non IC new construction, 9.0" x 4.80" Battery 2Light trimless (comes with the installation frame). To be use only with accesible ceilings only.

Battery 2L Trimless
Ceiling Recessed Downlight

Optional Accesories

Image	QTY	Item Number	Description
		08.8495.14	Honeycomb
		08.8503.64.OD	Blue Filter
		08.8503.65.OD	Sky Blue Filter
		08.8503.66.OD	Amber Filter
		08.8503.67.OD	Red Filter
		08.8503.69	Hot Light
		08.8503.CL	Old light
		08.8503.DL	Daylight
		08.8503.ND	Neodinium