


The Tracking Magnet EVO

High-tech LED lighting system for interior architecture

Spot 120 LED Array How to specify 03.8155.40.DA

Accent LED Spot modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Honeycomb and cross baffle comes standard with the fixture. IP20.

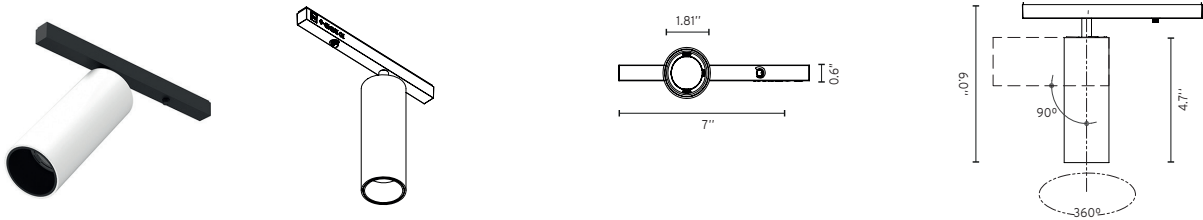

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric														
3000	90	1138	687	12.5	17°	03.8155	<input type="checkbox"/> 40 = White <input type="checkbox"/> 14 = Black <input type="checkbox"/> 05 = Chrome	Dimmable on Board 1V = 0-10V, 10% Dimming DA = DALI, 10% Dimming	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>17°</td> </tr> <tr> <td>1</td> <td>4780 0.31</td> </tr> <tr> <td>2</td> <td>1195 0.61</td> </tr> <tr> <td>3</td> <td>531 0.92</td> </tr> <tr> <td>4</td> <td>299 1.23</td> </tr> <tr> <td>5</td> <td>191 1.53</td> </tr> </tbody> </table>	E(x)	D(m)	h(m)	17°	1	4780 0.31	2	1195 0.61	3	531 0.92	4	299 1.23	5	191 1.53
E(x)	D(m)																						
h(m)	17°																						
1	4780 0.31																						
2	1195 0.61																						
3	531 0.92																						
4	299 1.23																						
5	191 1.53																						
2700	90	1075	654	12.5	17°	03.8154	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>17°</td> </tr> <tr> <td>1</td> <td>4547 0.31</td> </tr> <tr> <td>2</td> <td>1137 0.61</td> </tr> <tr> <td>3</td> <td>505 0.92</td> </tr> <tr> <td>4</td> <td>284 1.23</td> </tr> <tr> <td>5</td> <td>182 1.53</td> </tr> </tbody> </table>	E(x)	D(m)	h(m)	17°	1	4547 0.31	2	1137 0.61	3	505 0.92	4	284 1.23	5	182 1.53		
E(x)	D(m)																						
h(m)	17°																						
1	4547 0.31																						
2	1137 0.61																						
3	505 0.92																						
4	284 1.23																						
5	182 1.53																						
3000	90	1138	629	12.5	40°	03.8157	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>40°</td> </tr> <tr> <td>1</td> <td>1437 0.73</td> </tr> <tr> <td>2</td> <td>359 1.45</td> </tr> <tr> <td>3</td> <td>160 2.18</td> </tr> <tr> <td>4</td> <td>90 2.91</td> </tr> <tr> <td>5</td> <td>57 3.64</td> </tr> </tbody> </table>	E(x)	D(m)	h(m)	40°	1	1437 0.73	2	359 1.45	3	160 2.18	4	90 2.91	5	57 3.64		
E(x)	D(m)																						
h(m)	40°																						
1	1437 0.73																						
2	359 1.45																						
3	160 2.18																						
4	90 2.91																						
5	57 3.64																						
2700	90	1075	599	12.5	40°	03.8156	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>40°</td> </tr> <tr> <td>1</td> <td>1367 0.73</td> </tr> <tr> <td>2</td> <td>342 1.45</td> </tr> <tr> <td>3</td> <td>152 2.18</td> </tr> <tr> <td>4</td> <td>85 2.91</td> </tr> <tr> <td>5</td> <td>55 3.64</td> </tr> </tbody> </table>	E(x)	D(m)	h(m)	40°	1	1367 0.73	2	342 1.45	3	152 2.18	4	85 2.91	5	55 3.64		
E(x)	D(m)																						
h(m)	40°																						
1	1367 0.73																						
2	342 1.45																						
3	152 2.18																						
4	85 2.91																						
5	55 3.64																						