


## The Tracking Magnet EVO

High-tech LED lighting system for interior architecture

Spot 120 Power LED      How to specify      03.8053.40.DA

Accent LED Spot modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Honeycomb and cross baffle comes standard with the fixture. IP20.

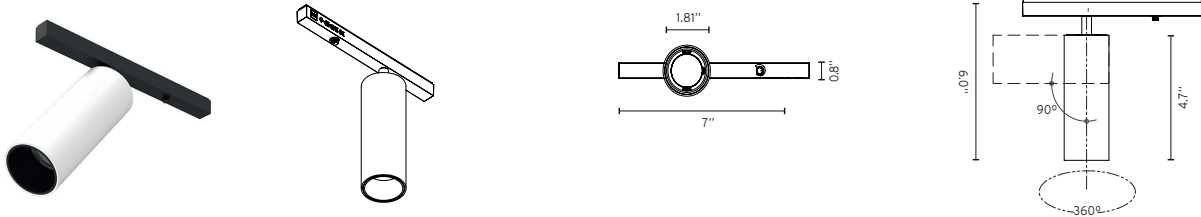

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric														
3000	90	779	558	12	11°	03.8053	□ 40 = White ■ 14 = Black ◐ 05 = Chrome	Dimmable on Board 1V = 0-10V, 10% Dimming DA = DALI, 10% Dimming	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>17°</td> </tr> <tr> <td>1</td> <td>4780 0.31</td> </tr> <tr> <td>2</td> <td>1195 0.61</td> </tr> <tr> <td>3</td> <td>531 0.92</td> </tr> <tr> <td>4</td> <td>299 1.23</td> </tr> <tr> <td>5</td> <td>191 1.53</td> </tr> </tbody> </table> Luminous flux luminaire 687 lm	E(x)	D(m)	h(m)	17°	1	4780 0.31	2	1195 0.61	3	531 0.92	4	299 1.23	5	191 1.53
E(x)	D(m)																						
h(m)	17°																						
1	4780 0.31																						
2	1195 0.61																						
3	531 0.92																						
4	299 1.23																						
5	191 1.53																						
2700	90	724	539	12	11°	03.8052	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>17°</td> </tr> <tr> <td>1</td> <td>4547 0.31</td> </tr> <tr> <td>2</td> <td>1137 0.61</td> </tr> <tr> <td>3</td> <td>505 0.92</td> </tr> <tr> <td>4</td> <td>284 1.23</td> </tr> <tr> <td>5</td> <td>182 1.53</td> </tr> </tbody> </table> Luminous flux luminaire 654 lm	E(x)	D(m)	h(m)	17°	1	4547 0.31	2	1137 0.61	3	505 0.92	4	284 1.23	5	182 1.53		
E(x)	D(m)																						
h(m)	17°																						
1	4547 0.31																						
2	1137 0.61																						
3	505 0.92																						
4	284 1.23																						
5	182 1.53																						
3000	90	779	505	12	17°	03.8055	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>40°</td> </tr> <tr> <td>1</td> <td>1437 0.73</td> </tr> <tr> <td>2</td> <td>359 1.45</td> </tr> <tr> <td>3</td> <td>160 2.18</td> </tr> <tr> <td>4</td> <td>90 2.91</td> </tr> <tr> <td>5</td> <td>57 3.64</td> </tr> </tbody> </table> Luminous flux luminaire 629 lm	E(x)	D(m)	h(m)	40°	1	1437 0.73	2	359 1.45	3	160 2.18	4	90 2.91	5	57 3.64		
E(x)	D(m)																						
h(m)	40°																						
1	1437 0.73																						
2	359 1.45																						
3	160 2.18																						
4	90 2.91																						
5	57 3.64																						
2700	90	724	487	12	17°	03.8054	<table border="1"> <thead> <tr> <th>E(x)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>h(m)</td> <td>40°</td> </tr> <tr> <td>1</td> <td>1367 0.73</td> </tr> <tr> <td>2</td> <td>342 1.45</td> </tr> <tr> <td>3</td> <td>152 2.18</td> </tr> <tr> <td>4</td> <td>85 2.91</td> </tr> <tr> <td>5</td> <td>55 3.64</td> </tr> </tbody> </table> Luminous flux luminaire 599 lm	E(x)	D(m)	h(m)	40°	1	1367 0.73	2	342 1.45	3	152 2.18	4	85 2.91	5	55 3.64		
E(x)	D(m)																						
h(m)	40°																						
1	1367 0.73																						
2	342 1.45																						
3	152 2.18																						
4	85 2.91																						
5	55 3.64																						