


The Tracking Magnet EVO

High-tech LED lighting system for interior architecture

Spot 150 How to specify 03.8073.40.DA

Accent LED Spot modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. IP20

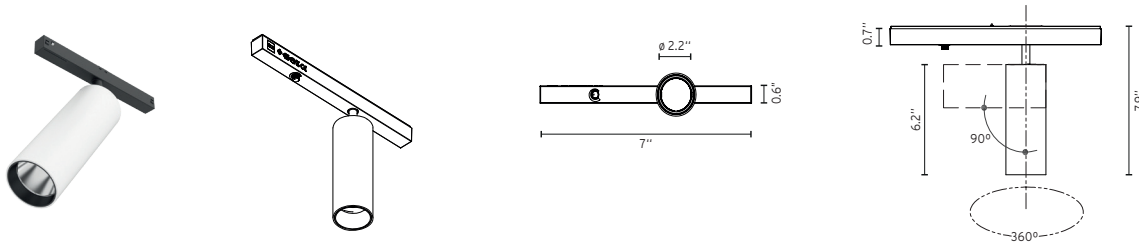


CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																		
3000	90	2115	1872	22.5	16°	03.8073			<table border="1"> <thead> <tr> <th>h(m)</th> <th>D(m)</th> <th>E(x)</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.28</td><td>17329</td></tr> <tr><td>2</td><td>0.56</td><td>4332</td></tr> <tr><td>3</td><td>0.84</td><td>1925</td></tr> <tr><td>4</td><td>1.12</td><td>1083</td></tr> <tr><td>5</td><td>1.40</td><td>693</td></tr> </tbody> </table> <p>Luminous flux luminaire: 1872 lm</p>	h(m)	D(m)	E(x)	1	0.28	17329	2	0.56	4332	3	0.84	1925	4	1.12	1083	5	1.40	693
h(m)	D(m)	E(x)																									
1	0.28	17329																									
2	0.56	4332																									
3	0.84	1925																									
4	1.12	1083																									
5	1.40	693																									
2700	90	2000	1770	22.5	16°	03.8072			<table border="1"> <thead> <tr> <th>h(m)</th> <th>D(m)</th> <th>E(x)</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.28</td><td>16385</td></tr> <tr><td>2</td><td>0.56</td><td>4096</td></tr> <tr><td>3</td><td>0.84</td><td>1821</td></tr> <tr><td>4</td><td>1.12</td><td>1024</td></tr> <tr><td>5</td><td>1.40</td><td>655</td></tr> </tbody> </table> <p>Luminous flux luminaire: 1770 lm</p>	h(m)	D(m)	E(x)	1	0.28	16385	2	0.56	4096	3	0.84	1821	4	1.12	1024	5	1.40	655
h(m)	D(m)	E(x)																									
1	0.28	16385																									
2	0.56	4096																									
3	0.84	1821																									
4	1.12	1024																									
5	1.40	655																									
3000	90	2115	1816	22.5	28°	03.8075			<table border="1"> <thead> <tr> <th>h(m)</th> <th>D(m)</th> <th>E(x)</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.50</td><td>8395</td></tr> <tr><td>2</td><td>1.00</td><td>2099</td></tr> <tr><td>3</td><td>1.50</td><td>933</td></tr> <tr><td>4</td><td>2.00</td><td>525</td></tr> <tr><td>5</td><td>2.50</td><td>336</td></tr> </tbody> </table> <p>Luminous flux luminaire: 1816 lm</p>	h(m)	D(m)	E(x)	1	0.50	8395	2	1.00	2099	3	1.50	933	4	2.00	525	5	2.50	336
h(m)	D(m)	E(x)																									
1	0.50	8395																									
2	1.00	2099																									
3	1.50	933																									
4	2.00	525																									
5	2.50	336																									
2700	90	2000	1717	22.5	28°	03.8074			<table border="1"> <thead> <tr> <th>h(m)</th> <th>D(m)</th> <th>E(x)</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.50</td><td>7938</td></tr> <tr><td>2</td><td>1.00</td><td>1984</td></tr> <tr><td>3</td><td>1.50</td><td>882</td></tr> <tr><td>4</td><td>2.00</td><td>496</td></tr> <tr><td>5</td><td>2.50</td><td>318</td></tr> </tbody> </table> <p>Luminous flux luminaire: 1717 lm</p>	h(m)	D(m)	E(x)	1	0.50	7938	2	1.00	1984	3	1.50	882	4	2.00	496	5	2.50	318
h(m)	D(m)	E(x)																									
1	0.50	7938																									
2	1.00	1984																									
3	1.50	882																									
4	2.00	496																									
5	2.50	318																									
3000	90	2115	1838	22.5	40°	03.8077			<table border="1"> <thead> <tr> <th>h(m)</th> <th>D(m)</th> <th>E(x)</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.73</td><td>4656</td></tr> <tr><td>2</td><td>1.46</td><td>1164</td></tr> <tr><td>3</td><td>2.18</td><td>517</td></tr> <tr><td>4</td><td>2.91</td><td>291</td></tr> <tr><td>5</td><td>3.64</td><td>186</td></tr> </tbody> </table> <p>Luminous flux luminaire: 1838 lm</p>	h(m)	D(m)	E(x)	1	0.73	4656	2	1.46	1164	3	2.18	517	4	2.91	291	5	3.64	186
h(m)	D(m)	E(x)																									
1	0.73	4656																									
2	1.46	1164																									
3	2.18	517																									
4	2.91	291																									
5	3.64	186																									
2700	90	2000	1738	22.5	40°	03.8076			<table border="1"> <thead> <tr> <th>h(m)</th> <th>D(m)</th> <th>E(x)</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.73</td><td>4402</td></tr> <tr><td>2</td><td>1.46</td><td>1101</td></tr> <tr><td>3</td><td>2.18</td><td>489</td></tr> <tr><td>4</td><td>2.91</td><td>275</td></tr> <tr><td>5</td><td>3.64</td><td>176</td></tr> </tbody> </table> <p>Luminous flux luminaire: 1738 lm</p>	h(m)	D(m)	E(x)	1	0.73	4402	2	1.46	1101	3	2.18	489	4	2.91	275	5	3.64	176
h(m)	D(m)	E(x)																									
1	0.73	4402																									
2	1.46	1101																									
3	2.18	489																									
4	2.91	275																									
5	3.64	176																									

- 40 = White
- 14 = Black
- 05 = Chrome

Dimmable on Board
 1V = 0-10V, 10% Dimming
 DA = DALI, 10% Dimming

The Tracking Magnet EVO
High-tech LED lighting system for interior architecture

Optional Accesories Spot 150

Image	QTY	Item Number	Description
		08.8429.00	Elliptical Lens
		08.8431.00	Elliptical Lens (to use with the holding ring)
		08.8432.00	Flood Lens (to use with the holding ring)
		08.8428.00	Honeycom
		08.0526.00	Snoot shielding cone