



## Climber Up&Down 275

Wall Surface Luminaire Designed by Piero Lissoni

### Description


A minimalist light box reaching new heights. Climber is an outdoor wall-mounted lighting fixture with LED light source with extends to illuminate ultimate limits. Vertically mounted, the simplistic geometric design shines up and down featuring a low copper, die-cast aluminum body. Glass-protected low optics are set to minimize glare and maximize visual comfort.



### Lamp

Lamps Type	LED
Wattage	40W
Output Nominal	2x1728lm, 2x1872lm, 2x2016lm
Color Temperature	2700K, 3000k, 4000K
Color rendering	CR180

### Dimensions



### Optical

Beam Angle	12°, 74°
Lighting Type	Wall-Washer
Light Distribution	Symmetrical Up & Down

### Physical

Material	Aluminum
Aiming	Fixed
Weight	6.9 Pounds
Ingress Protection Rating	IP65

### Certifications



Class 2 ADA Compliant

Suitable for Wet locations

### Photometrics

For current IES files please visit [architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty

2 years from date of sale.

### Finishes

Painted lacquer

- 01 White
- 06 Grey
- 12 Forest Green
- 30 Black
- 18 Deep Brown
- 33 Anthracite

Installation type	Wall surface (Includes JBOX Cover Plate)
Environment	Outdoor / Wet location





## Climber Up&Down 275

Wall Surface Luminaire Designed by Piero Lissoni



### Electrical & Control


Voltage	Input 120V
Control	Non Dimmable
Driver	Integral

### Performance

Maximum delivered output	2x 1475lm
Efficacy	73.75 lm/W

### Notes

### Dimensions



Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.

During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.

LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) over-voltage from primary voltage sources, (b) electrostatic discharge from the exterior environment.

Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

### Certifications



Class 2 ADA Compliant

Suitable for Wet locations

### Photometrics

For current IES files please visit [architectural.flosusa.com](http://architectural.flosusa.com)


### Warranty

2 years from date of sale.

## Climber Up&Down 275

Wall Surface luminaire Designed by Piero Lissoni

### How to specify

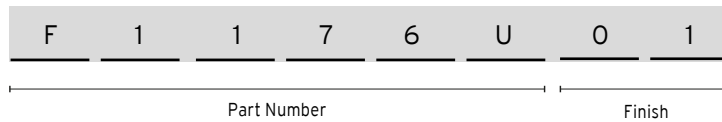


Part Number	Finish	CCT	Watts	Initial Lumens	Delivered Lumens	Beam Angle	CRI	Photometrics																		
F1176U01	White	2700	40W	2 x 1728	2 x 1264	10°	80	<p>Beam Angle: 16°</p> <table border="1"> <thead> <tr> <th>h(m)</th> <th>Elx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7525</td> <td>0.28</td> </tr> <tr> <td>2</td> <td>1881</td> <td>0.55</td> </tr> <tr> <td>3</td> <td>836</td> <td>0.83</td> </tr> <tr> <td>4</td> <td>470</td> <td>1.10</td> </tr> <tr> <td>5</td> <td>301</td> <td>1.38</td> </tr> </tbody> </table>	h(m)	Elx)	D(m)	1	7525	0.28	2	1881	0.55	3	836	0.83	4	470	1.10	5	301	1.38
h(m)	Elx)								D(m)																	
1	7525								0.28																	
2	1881								0.55																	
3	836								0.83																	
4	470								1.10																	
5	301	1.38																								
F1176U06	Grey																									
F1176U33	Anthracite																									
F1176U30	Black																									
F1176U18	Deep Brown																									
F1176U12	Forest Green																									
F1178U01	White	3000	40W	2 x 1872	2 x 1370																					
F1178U06	Grey																									
F1178U33	Anthracite																									
F1178U30	Black																									
F1178U18	Deep Brown																									
F1178U12	Forest Green																									
F1180U01	White	4000	40W	2 x 2016	2 x 1475																					
F1180U06	Grey																									
F1180U33	Anthracite																									
F1180U30	Black																									
F1180U18	Deep Brown																									
F1180U12	Forest Green																									

## Climber Up&Down 275

Wall Surface luminaire Designed by Piero Lissoni

### How to specify

Part Number	Finish	CCT	Watts	Initial Lumens	Delivered Lumens	Beam Angle	CRI	Photometrics																		
F1177U01	White	2700	40W	2 x 1728 lm	2 x 1264	74°	80	 <table border="1"> <caption>Beam Angle: 72°</caption> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>560</td> <td>1.41</td> </tr> <tr> <td>2</td> <td>140</td> <td>2.83</td> </tr> <tr> <td>3</td> <td>62</td> <td>4.24</td> </tr> <tr> <td>4</td> <td>35</td> <td>5.65</td> </tr> <tr> <td>5</td> <td>22</td> <td>7.06</td> </tr> </tbody> </table>	h(m)	E(lx)	D(m)	1	560	1.41	2	140	2.83	3	62	4.24	4	35	5.65	5	22	7.06
h(m)	E(lx)								D(m)																	
1	560								1.41																	
2	140								2.83																	
3	62								4.24																	
4	35								5.65																	
5	22	7.06																								
F1177U06	Grey																									
F1177U33	Anthracite																									
F1177U30	Black																									
F1177U18	Deep Brown																									
F1177U12	Forest Green																									
F1179U01	White	3000	40W	2 x 1872 lm	2 x 1370																					
F1179U06	Grey																									
F1179U33	Anthracite																									
F1179U30	Black																									
F1179U18	Deep Brown																									
F1179U12	Forest Green																									
F1181U01	White	4000	40W	12 x 2016	2 x 1475																					
F1181U06	Grey																									
F1181U33	Anthracite																									
F1181U30	Black																									
F1181U18	Deep Brown																									
F1181U12	Forest Green																									