

Landlord Spot ø40 Bollard

Projector for ground poles installation designed by Piero Lissoni




Description

Landlord Spot is a versatile round spotlight, providing direct light for the outdoors. Its multi-functional spotlight can be placed on the wall, ceiling, ground, or even tree branch with an exclusive strap. Ideal for outdoor lighting applications make trees, plants, or shrubbery stand out.


Landlord is the lord of the earth and the lord of light, and if you are a flower or a tree or a simple two or four-legged animal, you have to ask Landlord for permission if you want to pass unharmed through the night. - Piero Lissoni



Dimensions



Certifications



Suitable for Wet locations

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamps Type	LED
Wattage	2.3W
Output Nominal	188lm, 195lm, 202lm
Color Temperature	2700K, 3000k, 4000K
Color rendering	CR180

Optical

Beam Angle	14°, 33°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable
Weight	0.66 Pounds
Ingress Protection Rating	IP66
Finishes	Painted lacquer

- 01 White
- 12 Forest Green
- 06 Grey
- 30 Black
- 18 Deep Brown
- 33 Anthracite
- 71 Anodized Black

Installation type	Ground Pole
Environment	Outdoor / Wet location

Landlord Spot ø40 Bollard

Projector for ground poles installation designed by Piero Lissoni



Electrical & Control

Input Fixture Voltage	24V
Control	Standard 0-10V dimming
Driver	Remote
Input Driver Voltage	120 - 277V
Output Driver Voltage	24V

Performance

Maximum delivered output	140
Efficacy	60.9 lm/W

Notes

Recommended connections for in-ground installations with a 2-way terminal block 4-pole IP68 water stop on 24V side. Order separately.


All drivers should be installed in weather resistant enclosures (by others) or indoors. Silicon filled wire-nuts where required, should be used on all line-voltage connections to avoid syphoning moisture to electrical components.

The painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.


During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.

LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) over-voltage from primary voltage sources, (b) electrostatic discharge from the exterior environment. Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

Dimensions



Certifications



Suitable for Wet locations

Photometrics

For current IES files please visit architectural.flosusa.com


Warranty

2 years from date of sale.

Landlord Spot ø40 Bollard

Projector for ground poles installation designed by Piero Lissoni

How to specify

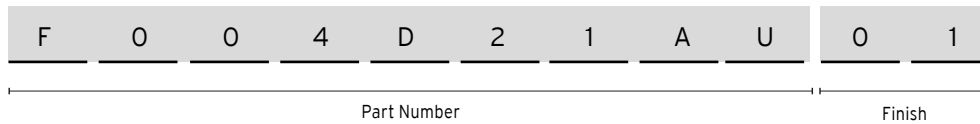

Part Number	Finish	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Photometrics																		
F004D21AU01	White	2700	80	188	130	2.3W	14°	<p>Beam Angle: 7° Luminous flux luminaire 145 lm</p> <table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>3868</td><td>0.14</td></tr> <tr><td>2</td><td>967</td><td>0.28</td></tr> <tr><td>3</td><td>430</td><td>0.41</td></tr> <tr><td>4</td><td>242</td><td>0.55</td></tr> <tr><td>5</td><td>155</td><td>0.69</td></tr> </tbody> </table>	h(m)	E(lx)	D(m)	1	3868	0.14	2	967	0.28	3	430	0.41	4	242	0.55	5	155	0.69
h(m)	E(lx)								D(m)																	
1	3868								0.14																	
2	967								0.28																	
3	430								0.41																	
4	242								0.55																	
5	155	0.69																								
F004D21AU06	Grey																									
F004D21AU33	Anthracite																									
F004D21AU30	Black																									
F004D21AU18	Deep Brown																									
F004F21AU71	Anodized Black																									
F004F21AU12	Forest Green																									
F004D31AU01	White	3000	80	195	135	2.3W	14°	<p>Beam Angle: 7° Luminous flux luminaire 145 lm</p> <table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>3868</td><td>0.14</td></tr> <tr><td>2</td><td>967</td><td>0.28</td></tr> <tr><td>3</td><td>430</td><td>0.41</td></tr> <tr><td>4</td><td>242</td><td>0.55</td></tr> <tr><td>5</td><td>155</td><td>0.69</td></tr> </tbody> </table>	h(m)	E(lx)	D(m)	1	3868	0.14	2	967	0.28	3	430	0.41	4	242	0.55	5	155	0.69
h(m)	E(lx)								D(m)																	
1	3868								0.14																	
2	967								0.28																	
3	430								0.41																	
4	242								0.55																	
5	155	0.69																								
F004D31AU06	Grey																									
F004D31AU33	Anthracite																									
F004D31AU30	Black																									
F004D31AU18	Deep Brown																									
F004F31AU71	Anodized Black																									
F004F31AU12	Forest Green																									
F004D41AU01	White	4000	80	202	140	2.3W	14°	<p>Beam Angle: 7° Luminous flux luminaire 145 lm</p> <table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>3868</td><td>0.14</td></tr> <tr><td>2</td><td>967</td><td>0.28</td></tr> <tr><td>3</td><td>430</td><td>0.41</td></tr> <tr><td>4</td><td>242</td><td>0.55</td></tr> <tr><td>5</td><td>155</td><td>0.69</td></tr> </tbody> </table>	h(m)	E(lx)	D(m)	1	3868	0.14	2	967	0.28	3	430	0.41	4	242	0.55	5	155	0.69
h(m)	E(lx)								D(m)																	
1	3868								0.14																	
2	967								0.28																	
3	430								0.41																	
4	242								0.55																	
5	155	0.69																								
F004D41AU06	Grey																									
F004D41AU33	Anthracite																									
F004D41AU30	Black																									
F004D41AU18	Deep Brown																									
F004F41AU71	Anodized Black																									
F004F41AU12	Forest Green																									
F004D22AU01	White	2700	80	188	130	2.3W	33°	<p>Beam Angle: 24° Luminous flux luminaire 492lm</p> <table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2087</td><td>0.47</td></tr> <tr><td>2</td><td>522</td><td>0.94</td></tr> <tr><td>3</td><td>232</td><td>1.41</td></tr> <tr><td>4</td><td>130</td><td>1.88</td></tr> <tr><td>5</td><td>83</td><td>2.35</td></tr> </tbody> </table>	h(m)	E(lx)	D(m)	1	2087	0.47	2	522	0.94	3	232	1.41	4	130	1.88	5	83	2.35
h(m)	E(lx)								D(m)																	
1	2087								0.47																	
2	522								0.94																	
3	232								1.41																	
4	130								1.88																	
5	83	2.35																								
F004D22AU06	Grey																									
F004D22AU33	Anthracite																									
F004D22AU30	Black																									
F004D22AU18	Deep Brown																									
F004F22AU71	Anodized Black																									
F004F22AU12	Forest Green																									
F004D32AU01	White	3000	80	195	135	2.3W	33°	<p>Beam Angle: 24° Luminous flux luminaire 492lm</p> <table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2087</td><td>0.47</td></tr> <tr><td>2</td><td>522</td><td>0.94</td></tr> <tr><td>3</td><td>232</td><td>1.41</td></tr> <tr><td>4</td><td>130</td><td>1.88</td></tr> <tr><td>5</td><td>83</td><td>2.35</td></tr> </tbody> </table>	h(m)	E(lx)	D(m)	1	2087	0.47	2	522	0.94	3	232	1.41	4	130	1.88	5	83	2.35
h(m)	E(lx)								D(m)																	
1	2087								0.47																	
2	522								0.94																	
3	232								1.41																	
4	130								1.88																	
5	83	2.35																								
F004D32AU06	Grey																									
F004D32AU33	Anthracite																									
F004D32AU30	Black																									
F004D32AU18	Deep Brown																									
F004F32AU71	Anodized Black																									
F004F32AU12	Forest Green																									
F004D42AU01	White	4000	80	202	140	2.3W	33°	<p>Beam Angle: 24° Luminous flux luminaire 492lm</p> <table border="1"> <thead> <tr> <th>h(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2087</td><td>0.47</td></tr> <tr><td>2</td><td>522</td><td>0.94</td></tr> <tr><td>3</td><td>232</td><td>1.41</td></tr> <tr><td>4</td><td>130</td><td>1.88</td></tr> <tr><td>5</td><td>83</td><td>2.35</td></tr> </tbody> </table>	h(m)	E(lx)	D(m)	1	2087	0.47	2	522	0.94	3	232	1.41	4	130	1.88	5	83	2.35
h(m)	E(lx)								D(m)																	
1	2087								0.47																	
2	522								0.94																	
3	232								1.41																	
4	130								1.88																	
5	83	2.35																								
F004D42AU06	Grey																									
F004D42AU33	Anthracite																									
F004D42AU30	Black																									
F004D42AU18	Deep Brown																									
F004F42AU71	Anodized Black																									
F004F42AU12	Forest Green																									

Landlord Spot ø40 Bollard

Projector for ground poles installation designed by Piero Lissoni

Required Accessories

Pole with base.
 Ready for installation on solid surface.
 Ground installation needs earth stick use, to be ordered as separated item.

Earth Stick for ground installation to be combined with the pole.

Tree strap.
 Accessory for spot installation directly on three branch, from ø30mm up to ø100mm.

1ft [300 mm] Part Number:

Part Number: F004Z060000

Part Number: F004Z070000

- F004Z010001 White
- F004Z010006 Grey
- F004Z010033 Anthracite
- F004Z010030 Black
- F004Z010018 Deep Brown
- F004Z0D0012 Forest Green
- F004Z0D0071 Anodized Black



2ft [600 mm] Part Number:

- F004Z020001 White
- F004Z020006 Grey
- F004Z020033 Anthracite
- F004Z020030 Black
- F004Z020018 Deep Brown
- F004Z0E0012 Forest Green
- F004Z0E0071 Anodized Black

Note: Not ULlisted mechinal Accessory

3ft [900 mm] Part Number:

- F004Z030001 White
- F004Z030006 Grey
- F004Z030033 Anthracite
- F004Z030030 Black
- F004Z030018 Deep Brown
- F004Z0F0012 Forest Green
- F004Z0F0071 Anodized Black



Landlord Spot ø40 Bollard

Projector for ground poles installation designed by Piero Lissoni

Required Accessories

LED power supply source for remote installation, 24V/90W, 120-277V, OUTDOOR IP65
Requires watertight outdoor NEMA rated enclosure(not supplied, by others)




LED power supply source for remote installation, 24V/60W, 120-277V, OUTDOOR IP65
Requires watertight outdoor NEMA rated enclosure(not supplied, by others)

LED power supply source for remote installation, 24V/40W, 120-277V, OUTDOOR IP65
Requires watertight outdoor NEMA rated enclosure(not supplied, by others)

LED90W24V-PWM-B01

LED60W24V-PWM-B01

LED40W24V-PWM-B01

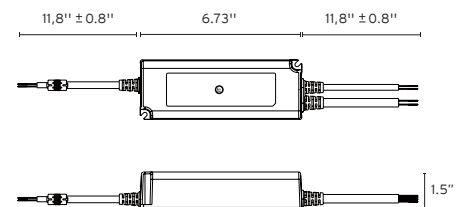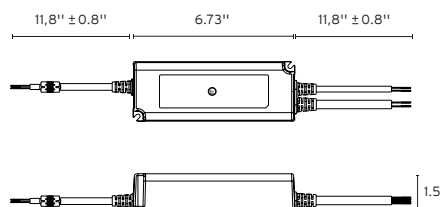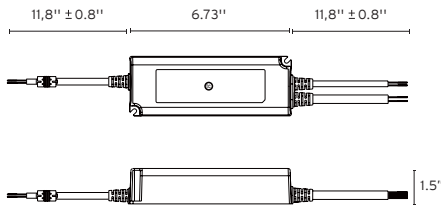

Optional Accessories

Honeycomb

Flood Lens

Part Number: F004Z0B0000

Part Number: F004Z0C0000

